


CWRS-FA-Series Front Mounted Recessed Shower Panel

✓	MODEL NUMBER	VALVE TYPE
	CWRS-PM1-FA	SINGLE TEMP PNEU. METERING
	CWRS-PM2-FA	DUAL TEMP PNEU. METERING
	CWRS-EL1-FA	SINGLE TEMP ELECTRONIC
	CWRS-EL2-FA	DUAL TEMP ELECTRONIC
	CWRS-PB-FA	PRESSURE BALANCING
	CWRS-TSV-FA	THERMOSTATIC
	CWRS-H-FA	SINGLE TEMP COMPRESSION
	CWRS-HC-FA	DUAL TEMP COMPRESSION
	CWRS-NV-FA	NO VALVE

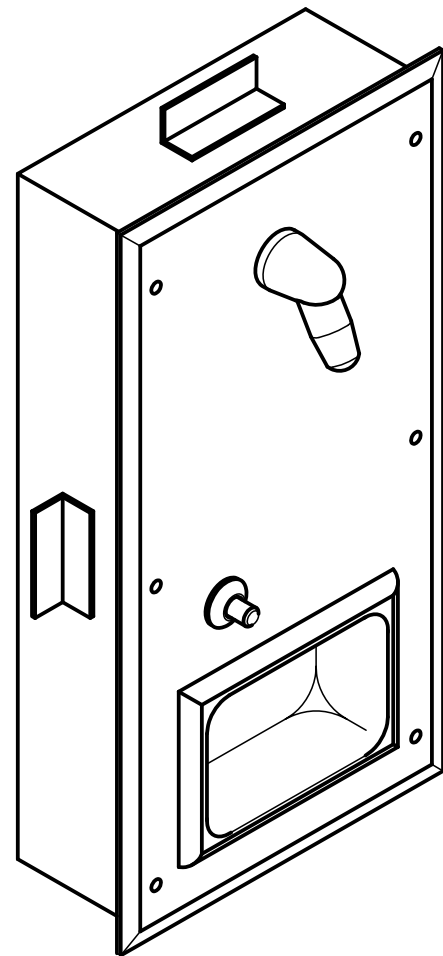

(Some options may be shown)

Recommended Specifications _____

Recessed front access shower panel shall be Willoughby Model No. **CWRS-____-FA** (select from table above).

Shower panel shall be fabricated from 16 gauge, type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish. Mounting frame shall be fabricated from 18 gauge galvanized steel.

Standard equipment shall include: _____ shower valve (as selected from table above), vandal resistant shower head (APS), and mounting frame.

Shower panel shall attach to mounting frame with vandal resistant stainless steel screws. Unit requires no chase area for installation and maintenance.

Made In The **U.S.A.**



Visit our website at <http://www.willoughby-ind.com>

2210 West Morris Street • P.O. Box 21217 • Indianapolis, IN 46221

(317) 638-2381 • Fax: (317) 638-6110 • (800) 428-4065

MODEL NUMBER AND OPTIONS:

1.) Shower Head Height

(Not Part of Model Number):

- 6'-0"
- 5'-6"
- 5'-0"
- 4'-0"
- Other _____"

4.) Shower Head Options:

- APS Adjustable Penal Shower Head (Standard)
- NPS Non-Adjustable Penal Shower Head
- UBJ Universal Ball Joint Shower Head
- UDBJ Up Down Ball Joint Shower Head
- LBJ Lockable Ball Joint Shower Head
- FX Flexshower

2.) Base Model Number:

- CWRS-FA Front Mounted Recessed Shower

5.) Options:


- BF Barrier Free Station
- GB Grab Bar (Specify Dimensions)
- GX Individual Checkstops
- HL Hi-Lo (2 Mounting Brackets for Flexshower)
- RD Recessed Soap Dish
- SD Surface Mounted Soap Dish
- Other: _____
- Other: _____

3.) Valve Selection:

- PM1 Single Temp. Pneu. Metering
- PM2 Dual Temp. Pneu. Metering
- EL1 Single Temp. Electronic
- EL2 Dual Temp. Electronic
- PB Pressure Balancing
- TSV Thermostatic Mixing Valve
- H Single Temp. Compression
- HC Dual Temp. Compression
- NV No Valve

Drawing Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS PRIOR TO ROUGH-IN

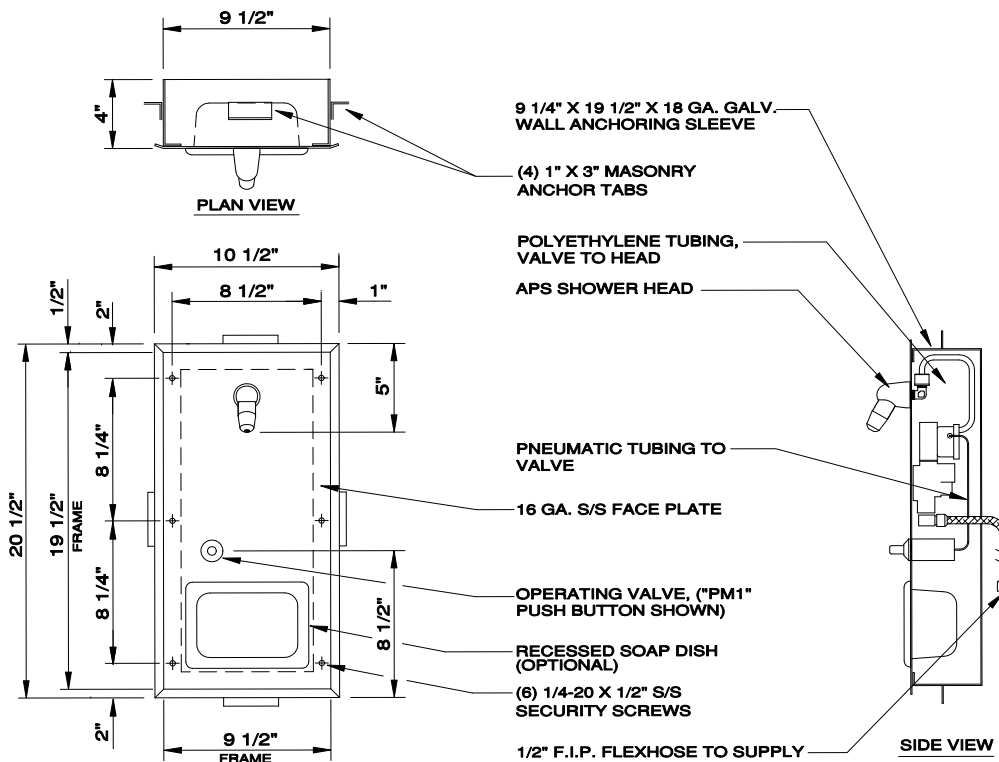

(Length 20")

To specify fixture and accessories, use the Model Number and Options Guide.
 Example: To specify a recessed front access shower with single temp. pneumatic metering valve, adjustable penal showerhead and recessed mounted soap dish. Use the following Willoughby Model Number:
 Willoughby Model Number: CWRS-PM1-APS-RD

Willoughby Industries, Inc.

Made In The U.S.A.

