




SS-Series Rear Mounted Service Sink

✓	MODEL NUMBER	CABINET MOUNTING	LENGTH	WIDTH
	SS-2219-OF	WALL	22"	19"
	SS-2219-FM	FLOOR	22"	19"
	SS-2419-OF	WALL	24"	19"
	SS-2419-FM	FLOOR	24"	19"

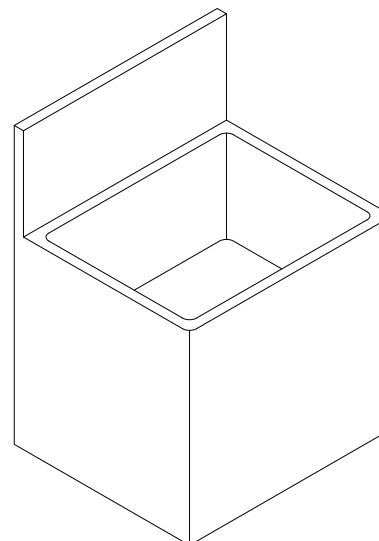

Recommended Specifications

Service Sink shall be Willoughby Model No. **SS-2__19-__**.

Entire fixture, including bracing and internal plumbing, shall be fabricated from 14 gauge, type 304, domestic stainless steel. The construction shall be all-welded, with exposed surfaces polished to a #4 satin finish.

Standard equipment shall include: rectangular shaped, 10" deep sink bowl, fast drain with air vent, and elbow waste 2" FIP.

Anchoring shall be by 6 or 8 point system: threaded rods, nuts and washers furnished for walls up to 8" thick. Unit requires chase area for installation and maintenance.

Made In The U.S.A.



Visit our website at <http://www.willoughby-ind.com>

2210 West Morris Street • P.O. Box 21217 • Indianapolis, IN 46221
(317) 638-2381 • Fax: (317) 638-6110 • (800) 428-4065

MODEL NUMBER AND OPTIONS

1.) Sink Type:

SS Service Sink

2.) Base Model Number:

2219 Service Sink, 22"x19"
 2419 Service Sink, 24"x19"

3.) Fixture Mounting & Waste:

OF Off-Floor, Wall Outlet
 FM On-Floor, Wall Outlet

4.) Spout Selection:

SE Spout with Plain End
 SH Spout with Hose End
 VB Vacuum Breaker (for use w/ hose end spout)

5.) Valve Selection: (Must Specify)

NV No Valve (Specify Hole Punching)
 (2) 1" Dia. Holes, 4" Centers
 (2) 1" Dia. Holes, 8" Centers
 (1) 1" Dia. Hole
 Special Punching (Specify)
 PS1 Single Temp. Pneu. Self-Closing
 PS2 Dual Temp. Pneu. Self-Closing
 PM1 Single Temp. Pneu. Metering
 PM2 Dual Temp. Pneu. Metering
 EL1 Single Temp. Electronic
 EL2 Dual Temp. Electronic
 PBH Hemispherical Pushbutton

Valve Manifold Options:

Pneumatic or Electronic only:

MA2
 MA3
 MA4

6.) Lavatory Waste:



EB Elbow Waste (Standard)
 PT Integral P-Trap

7.) Options:


ISH Integral Shelf
 MT Metal Template
 WS Wall Sleeve
 VG Ventilation Grille (Specify Location and Free Area)

Drawing Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS PRIOR TO ROUGH-IN

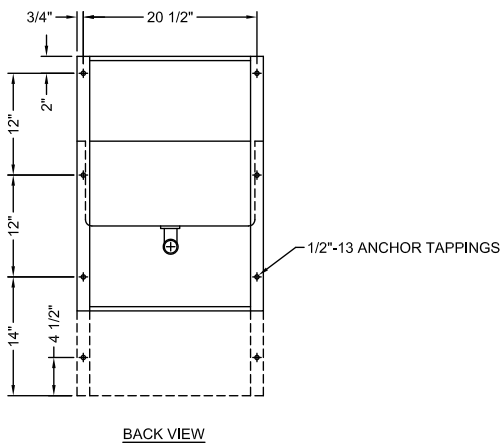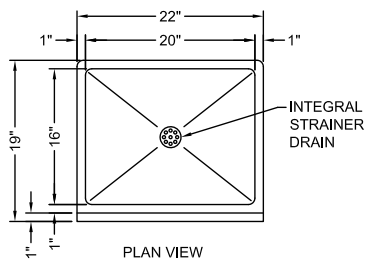

'OF' = WALL HUNG
 'FM' = FLOOR MOUNT

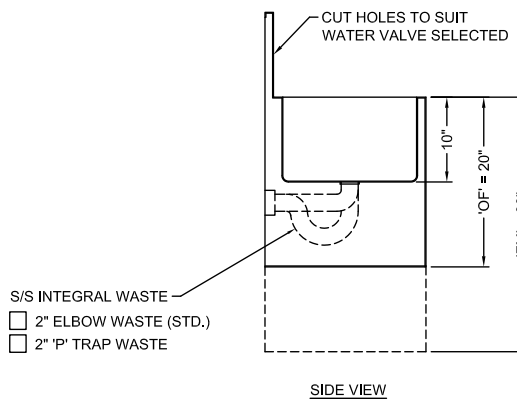

To specify fixture and accessories, use the Model Number and Options Guide.
 Example: To specify an SS-2219 22"x19" service sink with plain end spout, dual temp, self closing pneumatic metering valve, and integral p-trap. Use the following Willoughby Model Number:
 Willoughby Model Number: SS-2219-SE-PS2-PT

Willoughby Industries, Inc.

Made In The U.S.A.

