


SS-Series Service Sink

✓	MODEL NUMBER	CABINET MOUNTING	LENGTH	WIDTH
	SS-2219-OF	WALL	22"	19"
	SS-2219-FM	FLOOR	22"	19"
	SS-2419-OF	WALL	24"	19"
	SS-2419-FM	FLOOR	24"	19"

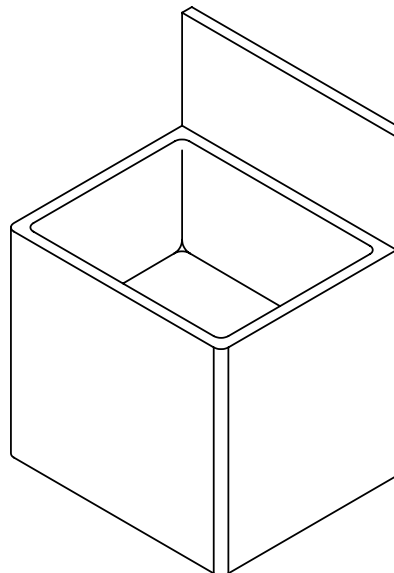

Recommended Specifications

Service Sink shall be Willoughby Model No. **SS-2__19-__**.

Entire fixture, including bracing and internal plumbing, shall be fabricated from 14 gauge, type 304, domestic stainless steel. The construction shall be all-welded, with exposed surfaces polished to a #4 satin finish.

Standard equipment shall include: rectangular shaped, 10" deep sink bowl, fast drain with air vent, and elbow waste 2" FIP.

Anchoring shall be by 6 or 8 point system: threaded rods, nuts and washers furnished for walls up to 8" thick. Unit requires chase area for installation and maintenance.

Visit our website at <http://www.willoughby-ind.com>

2210 West Morris Street • P.O. Box 21217 • Indianapolis, IN 46221
(317) 638-2381 • Fax: (317) 638-6110 • (800) 428-4065

MODEL NUMBER AND OPTIONS

1.) Sink Type:

- SS Service Sink

2.) Base Model Number:

- 2219 Service Sink, 22"x19"
 2419 Service Sink, 24"x19"

3.) Fixture Mounting & Waste:

- OF Off-Floor, Wall Outlet
 FM On-Floor, Wall Outlet

4.) Spout Selection:

- SE Spout with Plain End
 SH Spout with Hose End
 VB Vacuum Breaker (for use w/ hose end spout)

5.) Valve Selection: (Must Specify)

- NV No Valve (Specify Hole Punching)
 (2) 1" Dia. Holes, 4" Centers
 (2) 1" Dia. Holes, 8" Centers
 (1) 1" Dia. Hole
 Special Punching (Specify)
 PS1 Single Temp. Pneu. Self-Closing
 PS2 Dual Temp. Pneu. Self-Closing
 PM1 Single Temp. Pneu. Metering
 PM2 Dual Temp. Pneu. Metering
 EL1 Single Temp. Electronic
 EL2 Dual Temp. Electronic
 PBH Hemispherical Pushbutton

Valve Manifold Options:

Pneumatic or Electronic only:

- MA2
 MA3
 MA4

6.) Lavatory Waste:


- EB Elbow Waste (Standard)
 PT Integral P-Trap

7.) Options:

- ISH Integral Shelf
 MT Metal Template
 WS Wall Sleeve
 VG Ventilation Grille (Specify Location and Free Area)

Drawing Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____

VERIFY ALL DIMENSIONS PRIOR TO ROUGH-IN

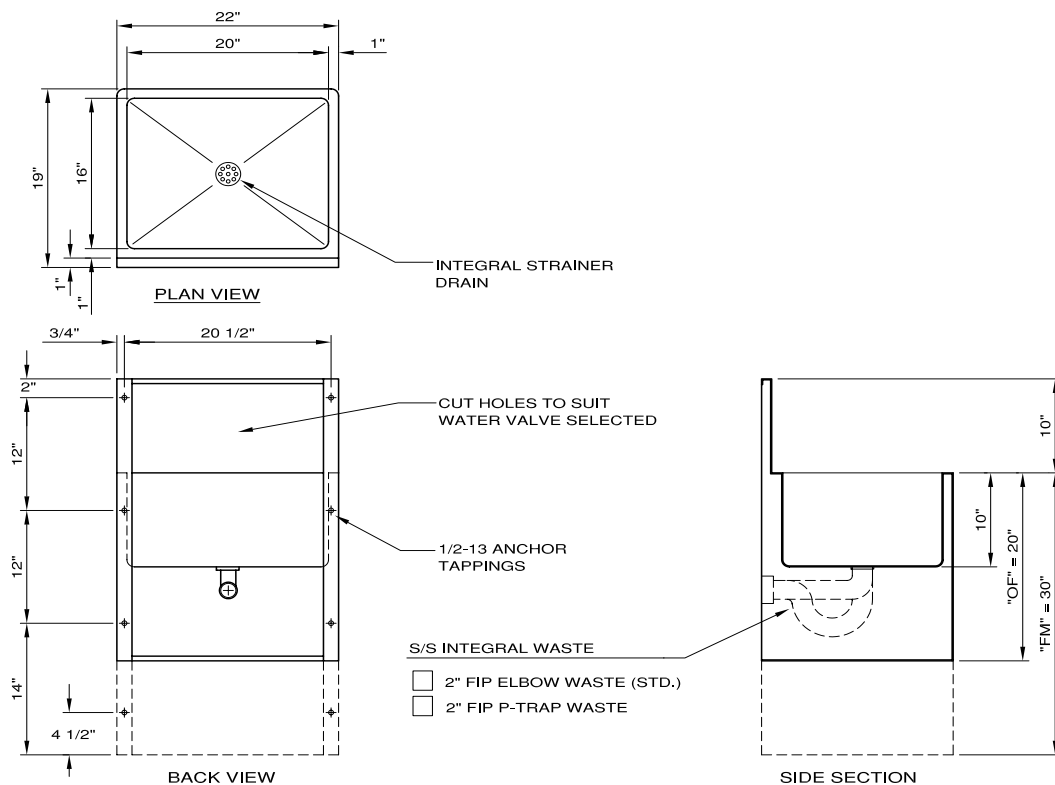

To specify fixture and accessories, use the Model Number and Options Guide.
 Example: To specify an SS-2219 22"x19" service sink with plain end spout, dual temp, self closing pneumatic metering valve, and integral p-trap. Use the following Willoughby Model Number:
 Willoughby Model Number: SS-2219-SE-PS2-PT

Willoughby Industries, Inc.