


WRS-BF-FA-2HD Front Mounted Recessed Handicap Shower Panel w/ (2) Fixed Showerheads

✓	MODEL NUMBER	VALVE TYPE
	WRS-PM1-PM1-BF-FA-2HD	SINGLE TEMP PNEU. METERING VALVE
	WRS-PM2-PM2-BF-FA-2HD	DUAL TEMP PNEU. METERING VALVE
	WRS-EL1-EL1-BF-FA-2HD	SINGLE TEMP ELECTRONIC
	WRS-EL2-EL2-BF-FA-2HD	DUAL TEMP ELECTRONIC
	WRS-NV-NV-BF-FA-2HD	NO VALVE

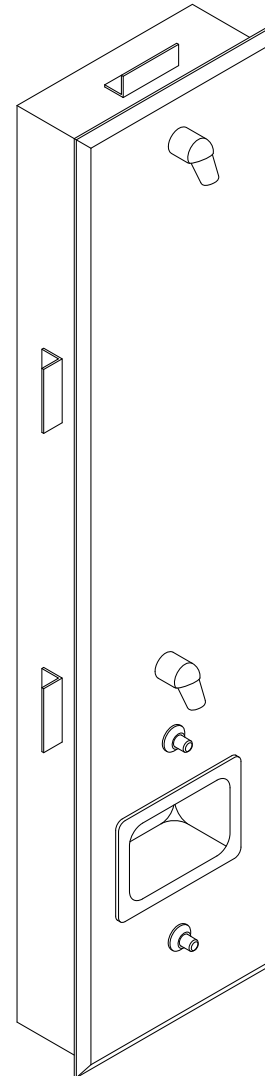

Recommended Specifications _____

Handicap front access recessed shower panel shall be Willoughby Model No. **WRS-___-BF-FA-2HD**.

Shower panel shall be fabricated from 14 gauge, type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish. Mounting frame shall be fabricated from 18 gauge galvanized steel.

Standard equipment shall include: shower valving (as selected from the table above), (2) vandal resistant shower heads (NPS).

Shower panel shall attach to mounting frame with security screws. Unit requires no chase area for installation and maintenance.

Made In The U.S.A.



Visit our website at <http://www.willoughby-ind.com>

2210 West Morris Street • P.O. Box 21217 • Indianapolis, IN 46221
(317) 638-2381 • Fax: (317) 638-6110 • (800) 428-4065

