
# Willoughby Industries - Security Products

WILLOUGHBY

ASDF-1013-06-FA Ligature-resistant Front Access 18" Wide Drinking Fountain

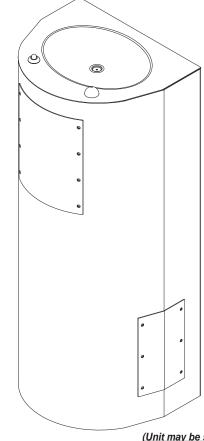

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page. Example: To specify a Ligature-resistant, Front Access, 18" Wide Drinking Fountain with standard ligatureresistant drinking fountain bubbler, single temp pneumatic non-metering valve, standard ligature-resistant pneumatic push button, standard removable p-trap, and metal wall template

Use the following Willoughby Model Number: ASDF-1013-06-FA-DMBH-PSL1-PBH-RPT-MT

## **Recommended Specifications**

Ligature-resistant, Front Access, 18" Wide Drinking Fountain shall be: Willoughby Model No. **ASDF-1013-06-FA** (select from model number and options list on next page)

Fixture shall be fabricated from 14 gauge, type 304 stainless steel. The construction shall be all-welded, with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Oval-shaped basin, 13" x 9-1/2" x 1-1/2" deep
- Integral slow drain with air vent
- (DMBH) deck-mounted ligature-resistant stainless steel drinking fountain bubbler
- (PSL1) Single temperature, non-metering pneumatic valve w/ (PBH) ligature-resistant pneumatic push button
- (RPT) slip joint, cast brass union 'p'-trap (1-1/2")
- (3) removable cabinet-mounted access panels attached w/ vandal resistant screws

Cabinet interior shall be sound deadened with fire-resistant material.

## Mounting:

Anchoring shall be from the front with anchoring holes provided. Anchoring hardware by others.

Unit requires no chase area for installation and maintenance.

### Vandal Resistance:

All push buttons and escutcheons are secured to the unit from within the fixture. Valves, water supplies and waste connections are concealed within. Access panels are removable and secured with vandal resistant security screws.





# MODEL NUMBER AND OPTIONS:

#### 1.) Drinking Fountain Model:

ASDF-1013-06-FA

Ligature-resistant, Front Access, 18" Wide Drinking Fountain

#### 2.) Bubbler Selection:

DMBH Deck Mounted Ligature-resistant Bubbler (Standard)

#### 3.) Valve Selection:

- PSL1
   Single Temp. Pneumatic Non-metering (Standard)
- PML1 Single Temp. Pneumatic Metering
- E1L1 Single Temp. Electronic\*

#### 4.) Push Button Selection:

- □ PBH Ligature-resistant Pneumatic Push Button (Standard)
   □ EPBH Ligature-resistant Electronic Push Button\*
- PZPB Piezo Push Button\*


\*(Req. 110V power through ground fault interrupter (GFCI) receptacle)

#### 5.) Drinking Fountain Waste:

 RPT Slip Joint, Cast Brass Union 'P'-trap (Removable, 1-1/2") (Standard)

#### 6.) Other Options:

- MT Wall Template
- Other:
- Other: \_\_\_\_\_

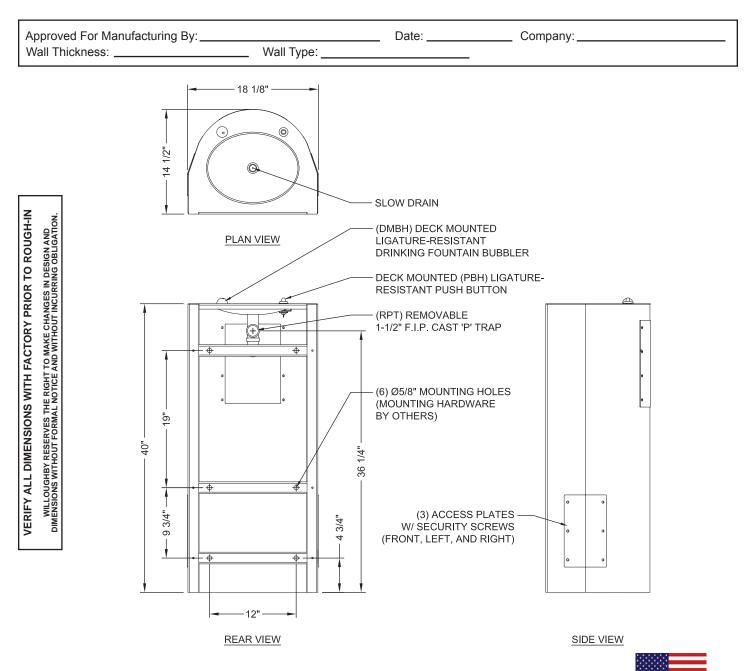

visit our website at www.willoughby-ind.com 5105 West 78th Street ● Indianapolis, IN. 46268 (317) 875-0830 ● Fax: (317) 875-0837 ● (800) 428-4065

MADE IN THE U.S.A.