

ASWRS-BF-2HD Series Ligature-resistant Rear Mounted Recessed Handicap Shower Panel w/(2) Fixed Shower Heads




Recommended Specifications

Ligature-resistant, Rear Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads shall be:
Willoughby Model No. **ASWRS-BF-2HD**
(Select from model number and options list on next page)

Shower panel shall be fabricated from 14 gauge, Type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:
- Shower valve (Select from Valve Selection options list)
- (2) (CSH) ligature-resistant, vandal resistant shower heads

Anchoring shall be by standard 8-point system: 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick. Unit requires chase area for installation and maintenance.

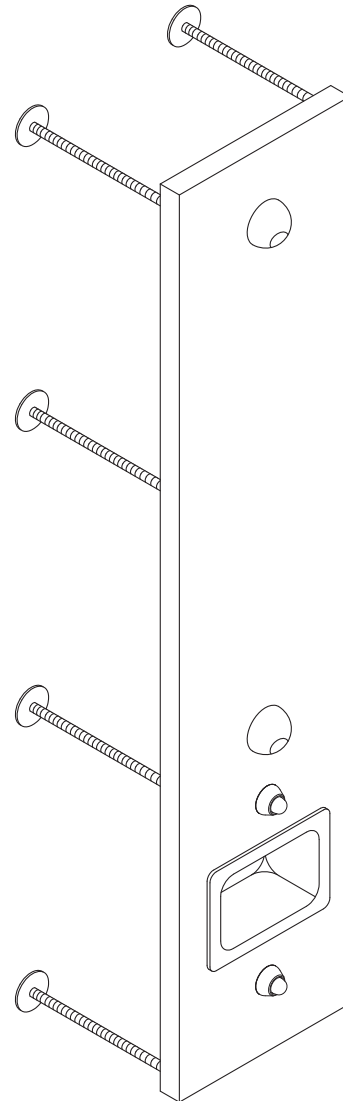

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Ligature-resistant, Rear Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads with single temp. pneumatic metering valves (manifolded), (PBH) pneumatic push buttons, standard 2.5GPM flow rate, standard (CSH) shower heads, in-line thermostatic mixing valve, and recessed mounted soap dish

Use the following Willoughby Model Number:
ASWRS-BF-2HD-PML1-MA2-PBH-2.5GPM-CSH-TMV-RD

MODEL NUMBER AND OPTIONS:

1.) Base Model Number:

- ASWRS-BF-2HD Ligature-resistant, Rear Mounted,
Recessed Handicap Shower Panel
w/(2) Fixed Shower Heads

2.) Valve Selection:

- NV No Valve
 PML1 Single Temp. Pneumatic Metering
 PML2 Dual Temp. Pneumatic Metering
 E1L1 Single Temp. Electronic (Pick Control)*
 E1L2 Dual Temp. Electronic (Pick Control)*

Valve Manifold Option:

Pneumatic or Electronic Valves Only:

(See the Manifold Option Page at the end of
Catalog Section **S5** for further information)

- MA2

3.) Push Button Selection:

Pneumatic or Electronic Valves Only:

- PBH Ligature-resistant Push Buttons
 EPBH Ligature-resistant Electronic Push Buttons*
 PZPB Piezo Push Buttons*

4.) Flow Rates:

- 2.5 GPM (Standard)
 2.0 GPM
 1.5 GPM

5.) Electronic Controls* (Must Use Electronic Push Button):

- WUSC-2200 WUSC-2400 Pneutronic WMS II

6.) Shower Head Selection:

- CSH Ligature-resistant Shower Heads (Standard)

7.) Options:


- TMV In-line Thermostatic Mixing Valve
 TF24H Hard-wired Transformer, 110VAC to 24VAC*
 TF24P Plug-in Transformer, 110VAC to 24VAC*
 RD Recessed Mounted Soap Dish
 WS Wall Sleeve
 MT Metal Template
 Other _____
 Other _____

*(Req. 110V power through ground fault interrupter (GFCI) receptacle)

Approved For Manufacturing By: _____ Date: _____ Company: _____
 Wall Thickness: _____ Wall Type: _____



VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

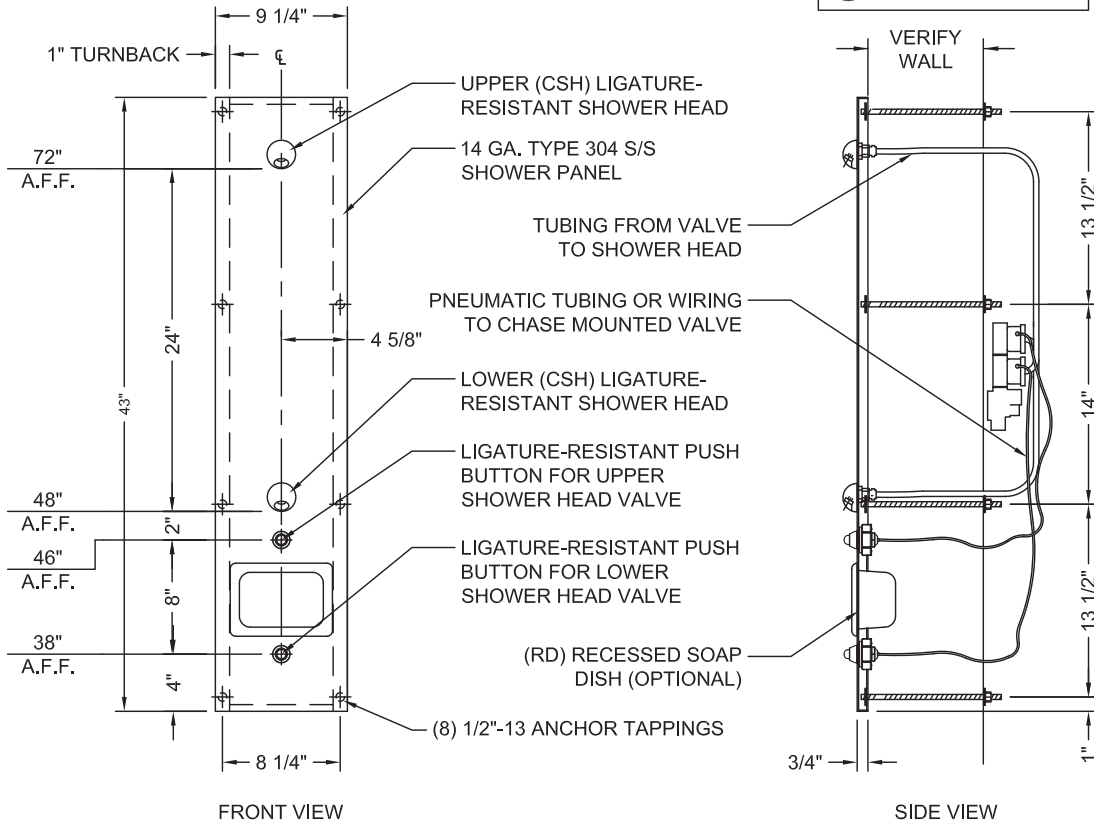

visit our website at www.willoughby-ind.com
 5105 West 78th Street • Indianapolis, IN. 46268
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.