


## CWCWS Series Continuous Wall Shower

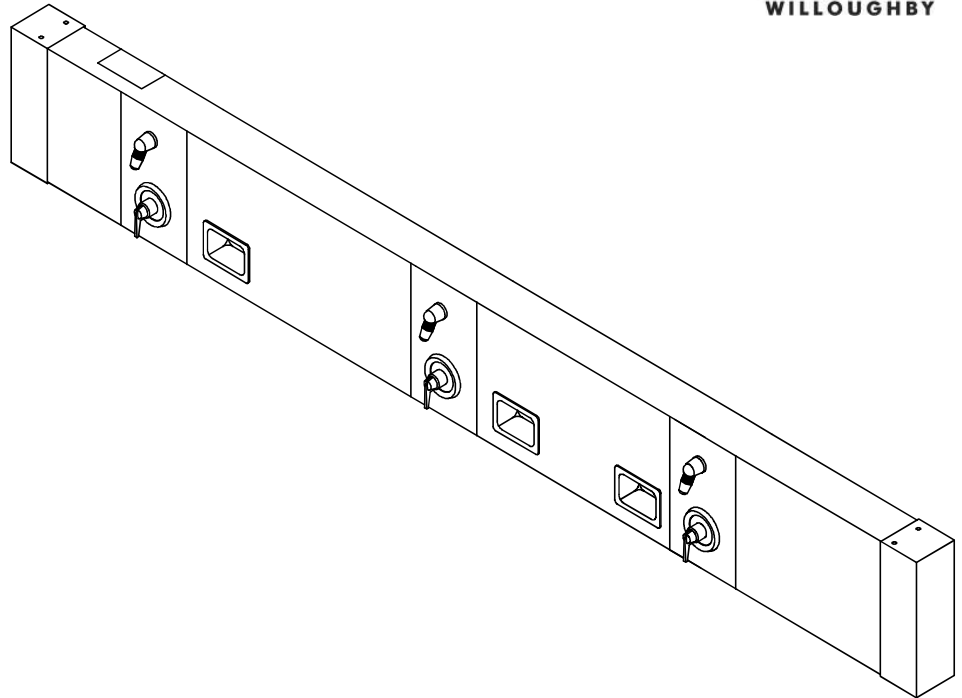

*(Unit may be shown with optional features)*

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Continuous Wall Shower system with (3) stations, temp./pressure-balancing mixing valves, standard 2.5 GPM flow rate, standard APS adjustable vandal-resistant shower heads, and recessed soap dishes

Use the following Willoughby Model Number:  
**CWCWS-3-TPV-2.5-APS-RD**

### Recommended Specifications

Continuous Wall Shower system shall be:  
Willoughby Model No. **CWCWS**  
(Select from model number and options list on next page)

Shower housing shall be fabricated from 16 gauge, Type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:

- Shower valves (from Valve Selection options list)
- Shower heads (from Shower Head Selection options list)
- Individual shower station panels fastened with vandal resistant security screws

Standard spacing between shower heads shall be 36"

Shower unit shall be factory pre-piped, tested for proper operation and ready for installation by contractor. Anchoring shall be by mounting bracket with Uni-Strut for supplies, with anchoring hardware by others. Unit requires no chase area for installation and maintenance.

Note: Continuous wall shower systems are designed for each specific application. **Contractor shall furnish to manufacturer exact field dimensions prior to fabrication.**

NUMBER OF SHOWER HEADS	INLET DIAMETER*
1 TO 4	3/4"
5 TO 8	1"
9 TO 11	1 1/4"
12+	1 1/2"

\*BASED ON 45 PSI INLET PRESSURE

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
5105 West 78th Street • Indianapolis, IN. 46268  
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

# MODEL NUMBER AND OPTIONS:

**1.) Base Model Number:**

CWCWS Continuous Wall Shower

**2.) Shower Stations:**

Number of Shower Stations (must specify): \_\_\_\_\_

**3.) Valve Selection:**

- NV No Valve
- PML1 Single Temp. Pneumatic Metering
- PML2 Dual Temp. Pneumatic Metering
- E1L1 Single Temp. Electronic (w/ Pneutronic Control)\*
- E1L2 Dual Temp. Electronic (w/ Pneutronic Control)\*
- PBV Pressure-Balancing Mixing Valve
- TPV Temperature/Pressure-Balancing Mixing Valve
- TPLR Ligature-resistant Temp/Pressure-balancing Mixing Valve
- SVC Single Temp. Compression Valve
- DVC Dual Temp. Compression Valves
- MA2 **Valve Manifold Option** (Pneumatic or Electronic Valves Only):  
(See the Manifold Option Page at the end of Catalog Section C14 for further information)

**4.) Push Button Selection:**

*Pneumatic or Electronic Valves Only:*

- PPB Pneumatic Push Buttons
- PBH Ligature-resistant Push Buttons
- EPB Electronic Push Buttons\*
- EPBH Ligature-resistant Electronic Push Buttons\*
- PZPB Piezo Electronic Push Buttons\*

**5.) Flow Rates:**

2.5 GPM (Standard)     2.0 GPM     1.5 GPM

**6.) Electronic Control\* (Must Use Electronic Push Button):**

WUSC-2200     WUSC-2400     Pneutronic

**7.) Shower Head Selection:**

- APS Adjustable Vandal-resistant Shower Head
- NPS Non-Adjustable Vandal-resistant Shower Head
- UBJ Universal Ball Joint Shower Head
- LBJ Lockable Ball Joint Shower Head
- CSH Ligature-resistant Shower Head
- FX Hand-held Flexshower Head (w/ quick disconnect, vacuum breaker, and (1) hook)


**8.) Other Options:**

- TF24H Hard-wired Transformer, 110VAC to 24VAC\* (Standard)
  - TF24P Plug-in Transformer, 110VAC to 24VAC\*
  - TMV Inline Thermostatic Mixing Valve
  - SD Surface Mounted Soap Dish
  - RD Recessed Mounted Soap Dish
  - GB Grab Bar (Wall Mounted, Specify Dimensions): \_\_\_\_\_
  - PS Pipe Shroud (Specify Length): \_\_\_\_\_
  - Other \_\_\_\_\_
  - Other \_\_\_\_\_
- \* (Req. 110V power through ground fault interrupter (GFCI) receptacle)

Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness: \_\_\_\_\_ Wall Type: \_\_\_\_\_

**CONTRACTOR SHALL FURNISH TO MANUFACTURER EXACT FIELD DIMENSIONS PRIOR TO FABRICATION**

**VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN**  
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

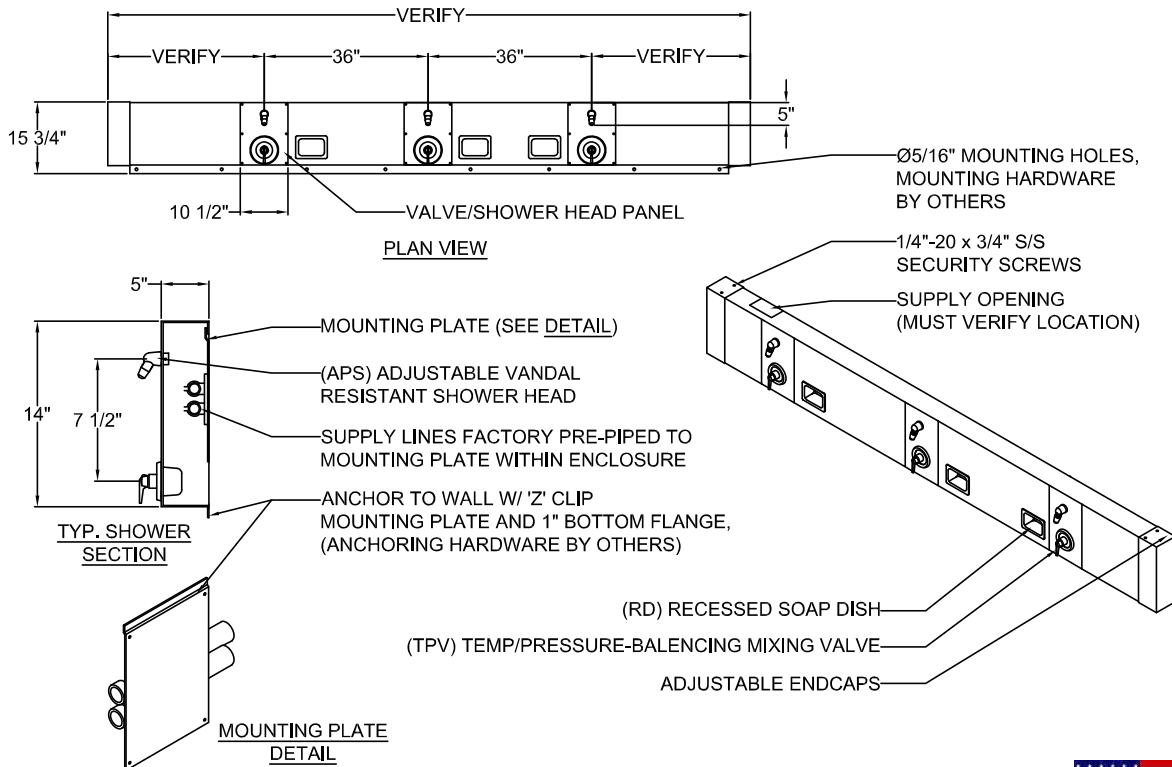

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
 5105 West 78th Street • Indianapolis, IN. 46268  
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.