


## UF-1438 Single Person Floor Mounted Stall Urinal

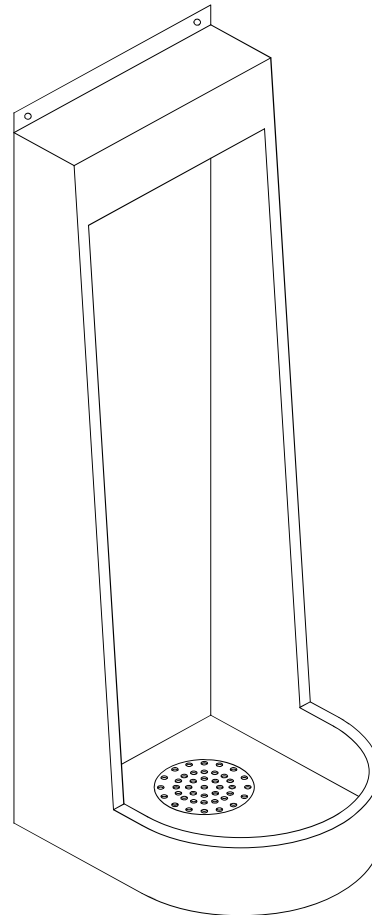

*(Unit may be shown with optional features)*

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Single Person, Floor Mounted Stall Urinal with back spud, hydraulic flush valve, flush valve connection, and flush valve access panel

Use the following Willoughby Model Number:  
**UF-1438-BS-FV-FVT-AP**

### Recommended Specifications

Single Person, Floor Mounted Stall Urinal shall be:  
Willoughby Model No. **UF-1438**  
(Select from model number and options list on next page)

Fixture is fabricated from 14 GA., Type 304 stainless steel. The construction shall be all-welded with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:  
- Full perimeter 360° flushing rim  
- Flat strainer

Urinal shall be washout type which requires 25 PSI minimum flushing pressure. Waste connection shall be 2" caulk type.

Anchoring shall be from the front with anchoring hardware by others.

Unit requires no chase area for installation and maintenance unless specified with (BS) Back Spud or any other options requiring an accessible chase.

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)

5105 West 78th Street • Indianapolis, IN. 46268  
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

# MODEL NUMBER AND OPTIONS:

**1.) Base Model Number:**

UF-1438 Single Person, Floor Mounted Stall Urinal

**2.) Inlet Location:**

BS Back Spud  
 TS Top Spud

**3.) Flush Valve GPF (Must Specify):**

1.0 GPF Low Flow

**4.) Options:**


MT Wall Template  
 FV Hydraulic Flush Valve (Includes Actuator)  
 EFV Electronic Flush Valve (Pick Control)\*  
 EFVP Electronic Flush Valve w/ (PZPB) Piezo Push Button (Pick Control)\*  
 ASUFVC Ligature-resistant Urinal Flush Valve Cover (Top Spud Only)  
 FVT Flush Valve Connection (Back Spud Only)  
 AP Flush Valve Access Panel (Allows access to chase mounted flush valve from fixture side)  
 TF24H Hard-wired Transformer, 110VAC to 24VAC\*  
 TF24P Plug-in Transformer, 110VAC to 24VAC\*  
 Other \_\_\_\_\_  
 Other \_\_\_\_\_

**5.) Electronic Controls\* (Must Use Electronic Flush Valve):**

WUFC-4000     Pneutronic     WMSII  
 \*(Req. 110V power through ground fault interrupter (GFCI) receptacle)

Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness: \_\_\_\_\_ Wall Type: \_\_\_\_\_

**VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN**  
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

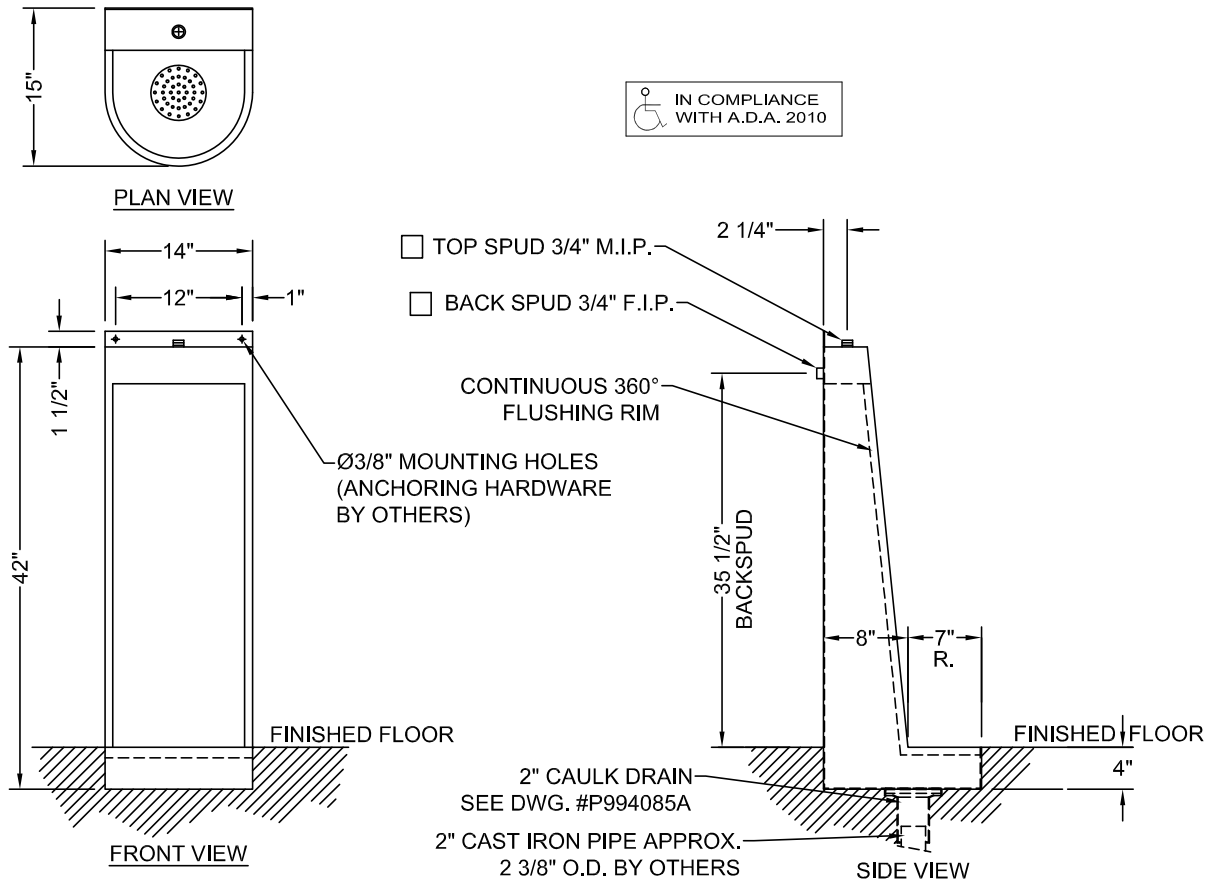

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
 5105 West 78th Street • Indianapolis, IN. 46268  
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.