
Willoughby Industries - Commercial Ware

WAW-2322-DMF

AquaWave®
Two Station
Solid Surface
Lavatory System
for (DMF) Deck
Mounted Faucets



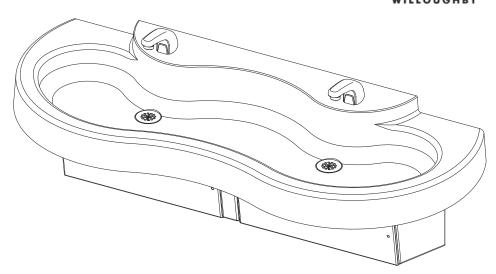

(FAUCETS SHOWN FOR ILLUSTRATIVE PURPOSES ONLY; FAUCETS SUPPLIED BY OTHERS)

(Unit may be shown with optional features)

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a two station AquaWave® lavatory for a deck mounted faucet with standard wall mounting (34" rim height), two sets of 4" Centerset 1" faucet holes, in White Granite color

Use the following Willoughby Model Number: WAW-2322-DMF-WALL-4CC-WG

Recommended Specifications

AquaWave® Two Station, Solid Surface Lavatory System for use with Deck Mounted Faucets shall be: Willoughby Model No. **WAW-2322-DMF** (select from model number and options list on next page)

AquaWave® Lavatory System shall accommodate 1 to 2 users simultaneously. The lavatory system bowl and pedestal panels are constructed of Aquasurf® molded cast polymer densified solid surface material composed of polyester/acrylic resin, UV stabilizer, aluminum trihydrate and mineral fillers. The preassembled low-profile pedestal base and included drain grates shall be constructed of heavy gauge, Type 304 stainless steel (the pedestal backplate is galvanized). Exposed stainless steel surfaces shall be polished to a #4 satin finish.

Vandal resistance:

Valves (by others), water supplies, and waste connections are concealed within the pedestal. Removable access panels are secured with vandal-resistant security Torx screws. The Aquasurf® solid surface material is resistant to stains, impact and burns. Surface damage can be easily repaired with everyday cleansers and/or fine grit abrasives.

ADA, TAS, and ANSI Compliant:

The lavatory is designed is designed to comply with all applicable ADA, TAS, and ANSI Z124.3 and Z124.6 accessibility guidelines, whether mounted at standard adult rim height (34" Max AFF) or (JR) junior height (31" Max AFF).

Optional Features:


AquaWave® Lavatory Systems offer liquid soap dispensers as optional accessories. A wall mounted stainless steel kick plate (KPWF) is available for installations with floor-based plumbing rough-ins.



MODEL NUMBER AND OPTIONS:

1.) Washfountain Model:			5.) Solid Surface Colors:	
■ WAW-23	322-DMF AquaWave® 2 Station Solid Surface Lavatory System	■ BN	Bone	
	for Deck Mounted Faucets	☐ GW	Glacier White	
		☐ GG	Grey Granite	
2.) Pedestal Type:			Sandstone	
■ WALL	Wall Mounted, Low-profile, with Solid Surface Panels (Standard)	■ WG	White Granite	
WSPS	Wall Mounted, Low-profile, All-Stainless Steel Shroud	□ BG	Black Granite	
		■ NB	Nocturnal Blue	
3.) Junior Height Option:		RC RC	Red Coral	
☐ JR	Junior Height (31" Rim Height, JR. ADA Compliant)	☐ SG	Sea Green	
4.) Faucet Drilling:			6.) Other Options:	
■ NV	No Valve, No Faucet Holes (Standard)	LSDM	Liquid Soap Dispensers- Deck-mounted Spout and Bottle	
☐ 4CC	Set of 4" Centerset, Ø1-1/4" Holes (Specify 2 or 3 holes:)	☐ KPWV	Wall Mounted Stainless Steel Kick Plate	
☐ 8CC	Set of 8" Centerset, Ø1-1/4" Holes (Specify 2 or 3 holes:)	Other		
☐ 1CC	Center Shank, (1) Ø1-1/4" Hole	Other		
□ SP	Special Drilling (Specify hole diameter and dimensions)			
	SP:			

Approved For Manufacturing By:		Date:	_ Company:
Wall Thickness:	Wall Type:		

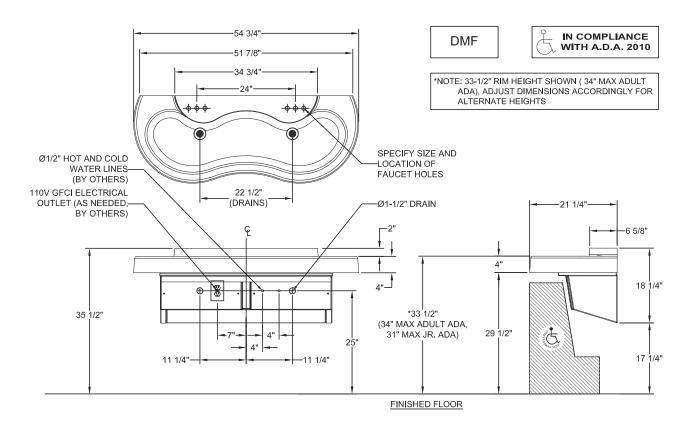

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

visit our website at www.willoughby-ind.com 5105 West 78th Street ● Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

