Willoughby Industries - Parks & Recreation

WODS Series Outdoor Shower

1	MODEL NUMBER	SHOWER HEADS	FOOT SHOWERS
	WODS-1-0	1	0
	WODS-1-1	1	1
	WODS-2-0	2	0
	WODS-2-1	2	1
	WODS-2-2	2	2
	WODS-4-0	4	0
	WODS-4-1	4	1
	WODS-4-2	4	2

To specify fixture and options, use the Model Number and Options page.

Example: To specify a WODS outdoor shower with 4 shower heads, 1 foot shower, 1.5 GPM flow rate, 316 stainless steel body / cap / flange, in Violet color

Use the following Willoughby Model Number: WODS-4-1-1.5-316-V

Recommended Specifications

Outdoor shower shall be Willoughby Model No. **WODS-__-**_ (select number of shower heads and foot showers from table above).


Model **WODS** outdoor shower shall be vandal resistant with a 304 stainless steel 8" Sched. 10 main column and 11 Ga. flange.

Shower heads shall be activated by recessed mounted solid stainless steel push button assemblies controlling lead-free metering valves. Shower unit is easily winterized by turning off the fixture supply line (shut-off valve by others), disconnecting the flexible supply hoses from the valves, and removing the valves from within the body; all valves are secured using a single-point attachment nut.

Shower heads and optional foot showers shall be Willoughby all-stainless steel (NPS) non-user adjustable shower heads.

Shower unit shall be factory assembled, tested for proper operation and ready for installation by a contractor. Unit to be anchored using 1/2"-13 anchoring bolts (by others).

Optional marine-grade type 316 stainless steel body (main column, flange, and cap) is available for applications in which the unit's exterior may come into contact with salt water.

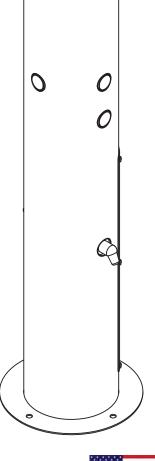



(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065

MODEL NUMBER AND OPTIONS:

1.) Outdoor Shower Type:

■ WODS

2.) Head Showers:

1 One (1) Head Shower **2** Two (2) Head Showers **4** Four (4) Head Showers

3.) Foot Showers:

□ 0 □ 1 No Foot Showers One (1) Foot Shower **2** Two (2) Foot Showers

4.) Flow Rates:

- 1.5 GPM (Standard)
- ☐ 2.0 GPM
- ☐ 2.5 GPM

5.) Options:

☐ 316-ODS 316 Stainless Steel Body For Outdoor Shower

☐ HBE Hose Bibb Exposed

☐ HBLD Recessed Hose Bibb W/Lock Door

☐ HBLD-SS Recessed Stainless Steel Hose Bibb W/Lock Door ☐ JF Jug Filler


CAR-ODS Surface Carrier For Outdoor Shower

6.) Colors (select one):

- ☐ SL Silver (Silvadillo)
- □ G Green
- ☐ R Red
- ☐ BL Blue
- Orange
- □ ∨ Violet
- □ Y Yellow
- ☐ BR Brown
- ☐ BK Black
- □ BE Beige \square W White

Approved For Manufacturing By: _ Date: _ Company: Wall Thickness:

Wall Type:







-4X Ø %" THRU ALL HOLES ON Ø10%" BOLT CIRCLE

SECTION A-A

VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION

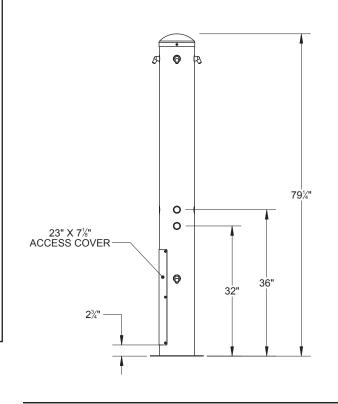

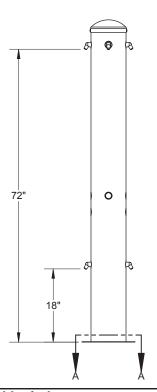



visit our website at www.willoughby-ind.com 5105 West 78th Street . Indianapolis, IN. 46268

(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065