

## WRS-BF-2HD Series Rear Mounted Recessed Handicap Shower Panel w/(2) Fixed Shower Heads




### Recommended Specifications

Rear Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads shall be:  
Willoughby Model No. **WRS-BF-2HD**  
(Select from model number and options list on next page)

Shower panel shall be fabricated from 14 gauge, Type 304 stainless steel with exposed stainless surfaces polished to a #4 satin finish.

Standard equipment shall include:  
- Shower valve (Select from Valve Selection options list)  
- (2) (NPS) non-adjustable penel shower heads

Anchoring shall be by standard 8-point system: 1/2" threaded rods, nuts and washers shall be furnished for walls up to 8" thick. Unit requires chase area for installation and maintenance.

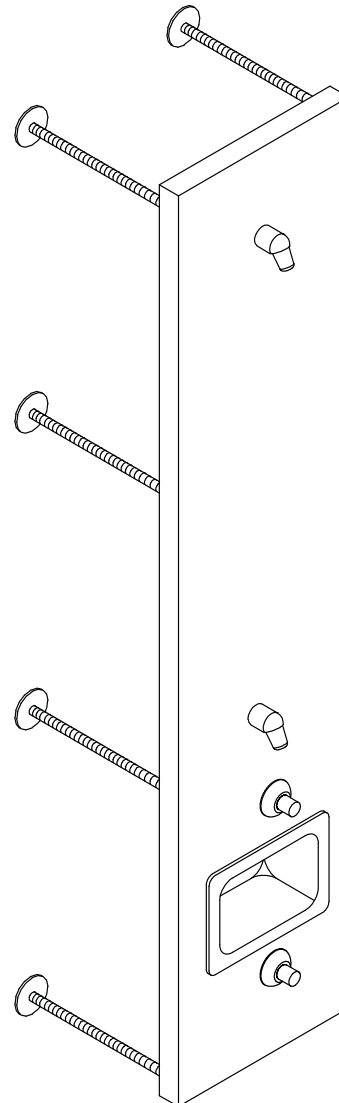

*(Unit may be shown with optional features)*

To specify fixture and accessories, use the Model Number and Options page.

Example: To specify a Rear Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads with single temp. pneumatic metering valves (manifolded), standard pneumatic push buttons, standard 2.5 GPM flow rate, standard (NPS) shower heads, in-line thermostatic mixing valve, and recessed mounted soap dish

Use the following Willoughby Model Number:  
**WRS-BF-2HD-PML1-MA2-PPB-2.5GPM-NPS-TMV-RD**

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)

5105 West 78th Street • Indianapolis, IN. 46268  
(317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.

# MODEL NUMBER AND OPTIONS:

## 1.) Base Model Number:

- WRS-BF-2HD Rear Mounted, Recessed Handicap Shower Panel w/(2) Fixed Shower Heads

## 2.) Valve Selection:

- NV No Valve  
 PML1 Single Temp. Pneumatic Metering  
 PML2 Dual Temp. Pneumatic Metering  
 E1L1 Single Temp. Electronic (Pick Control)\*  
 E1L2 Dual Temp. Electronic (Pick Control)\*

### Valve Manifold Option:

Pneumatic or Electronic Valves Only:

(See the Manifold Option Page at the end of Catalog Section **S5** for further information)

- MA2

## 3.) Push Button Selection:

Pneumatic or Electronic Valves Only:

- PPB Pneumatic Push Buttons  
 EPB Electronic Push Buttons\*  
 PZPB Piezo Push Buttons\*

## 4.) Flow Rates:

- 2.5 GPM (Standard)  
 2.0 GPM  
 1.5 GPM

## 5.) Electronic Controls\* (Must Use Electronic Push Button):

- WUSC-2200  WUSC-2400  Pneutronic  WMS II

## 6.) Shower Head Selection:

- NPS Non-adjustable Penal Shower Heads (Standard)  
 APS Adjustable Penal Shower Heads

## 7.) Options:


- TMV In-line Thermostatic Mixing Valve  
 TF24H Hard-wired Transformer, 110VAC to 24VAC\*  
 TF24P Plug-in Transformer, 110VAC to 24VAC\*  
 RD Recessed Mounted Soap Dish  
 SD Surface Mounted Soap Dish  
 WS Wall Sleeve  
 MT Metal Template  
 Other \_\_\_\_\_  
 Other \_\_\_\_\_

\*(Req. 110V power through ground fault interrupter (GFCI) receptacle)

Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness: \_\_\_\_\_ Wall Type: \_\_\_\_\_



**VERIFY ALL DIMENSIONS WITH FACTORY PRIOR TO ROUGH-IN**  
 WILLOUGHBY RESERVES THE RIGHT TO MAKE CHANGES IN DESIGN AND DIMENSIONS WITHOUT FORMAL NOTICE AND WITHOUT INCURRING OBLIGATION.

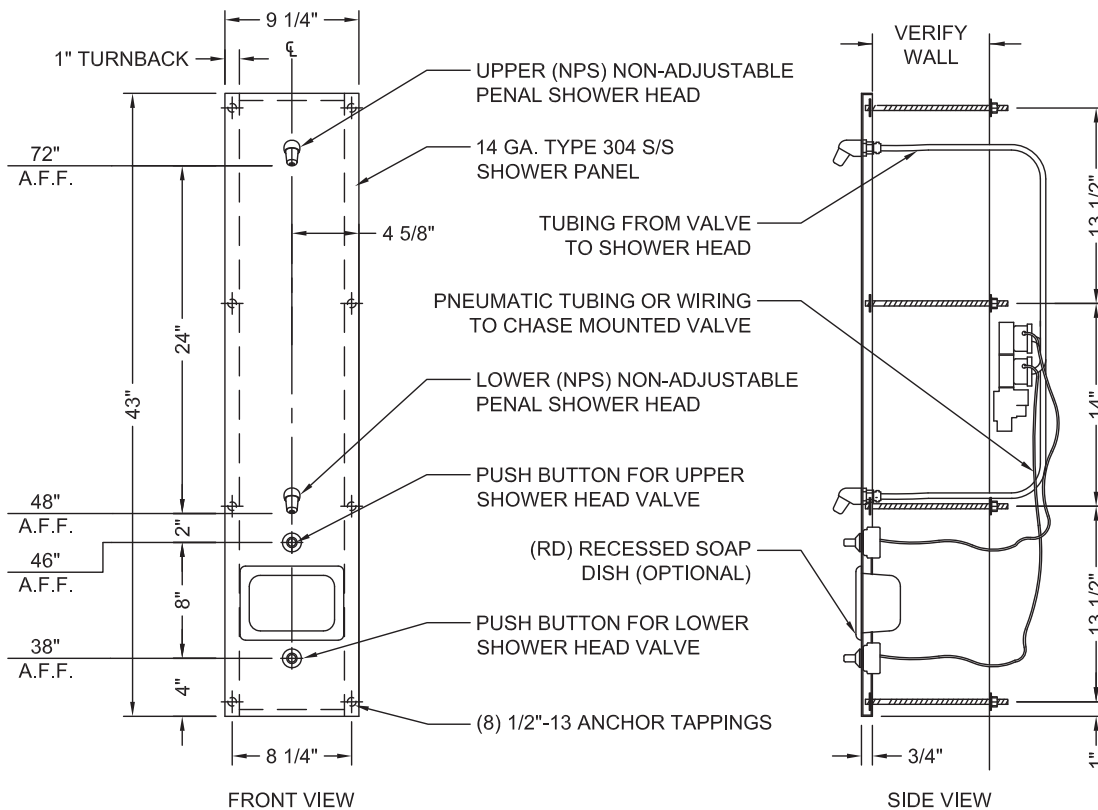

visit our website at [www.willoughby-ind.com](http://www.willoughby-ind.com)  
 5105 West 78th Street • Indianapolis, IN. 46268  
 (317) 875-0830 • Fax: (317) 875-0837 • (800) 428-4065



MADE IN THE U.S.A.