

## Handicap Cabinet Shower

✓	MODEL NUMBER	CABINET STYLE	LENGTH	WIDTH
	US-3636-HC	UNITIZED	36"	36"
	KS-3636-HC	KNOCKDOWN	36"	36"

### Recommended Specifications \_\_\_\_\_

Handicap cabinet shower shall be Willoughby Model No.      **S-3636-HC** (select from table above). Designed to meet ADA requirements .

Shower cabinet shall be fabricated from 14 gauge, type 304 stainless steel. Shower floor shall be fabricated from 11 gauge, type 304 stainless steel. The construction shall be **all-welded**, exposed stainless surfaces polished to a #4 satin finish, except shower floor which shall have a non-slip glass blast finish.


Standard equipment shall include: vandal resistant shower head (NPS), quick disconnect, vacuum breaker, hand held flex shower, fixed mounting bracket, 18" x 33" horizontally mounted grab bar, fold-up stainless steel seat, diverter valve, recess mounted soap dish, and 2" caulk drain with removable strainer.

Fixture is free-standing, no anchoring required. Unit requires chase area for installation and maintenance. **Unit requires 2" recess in floor.**

Under side of shower floor shall be sound deadened with fire resistant material.

**To specify Knock-Down Cabinet Shower:** select model number from the table above and use the recommended specification above omitting reference to **all-welded**.

*Please provide shower finish schedule upon ordering.*

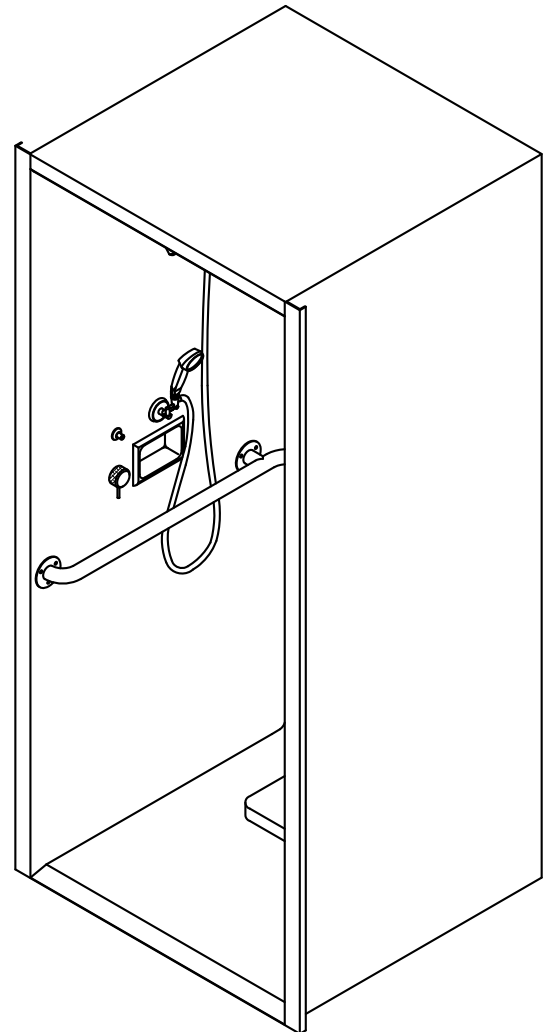

Made In The **U.S.A.**



Visit our website at <http://www.willoughby-ind.com>

2210 West Morris Street • P.O. Box 21217 • Indianapolis, IN 46221  
(317) 638-2381 • Fax: (317) 638-6110 • (800) 428-4065

# MODEL NUMBER AND OPTIONS:

**1.) Base Model Number:**

\_\_S-3636-HC Handicap Cabinet Shower


**3.) Options:**

- VG Ventilation Grille (specify free area and location)
- CP Closure Panels
- TH1 Release Towel Hook
- MD Modesty Door
- SD Surface Mounted Soap Dish
- TA Threshold Anchors
- CR Curtain Rod
- 2HD (2) Fixed Shower Heads
- APS Adjustable Penal Shower Head
- Other: \_\_\_\_\_
- Other: \_\_\_\_\_

**2.) Valve Selection:**

- NV No Valve
- PM1 Single Temp. Pneu. Metering
- PM2 Dual Temp. Pneu. Metering
- EL1 Single Temp. Electronic
- EL2 Dual Temp. Electronic
- PB Pressure Balancing
- TSV Thermostatic Mixing Valve

Drawing Approved For Manufacturing By: \_\_\_\_\_ Date: \_\_\_\_\_ Company: \_\_\_\_\_  
 Wall Thickness \_\_\_\_\_ Wall Type \_\_\_\_\_

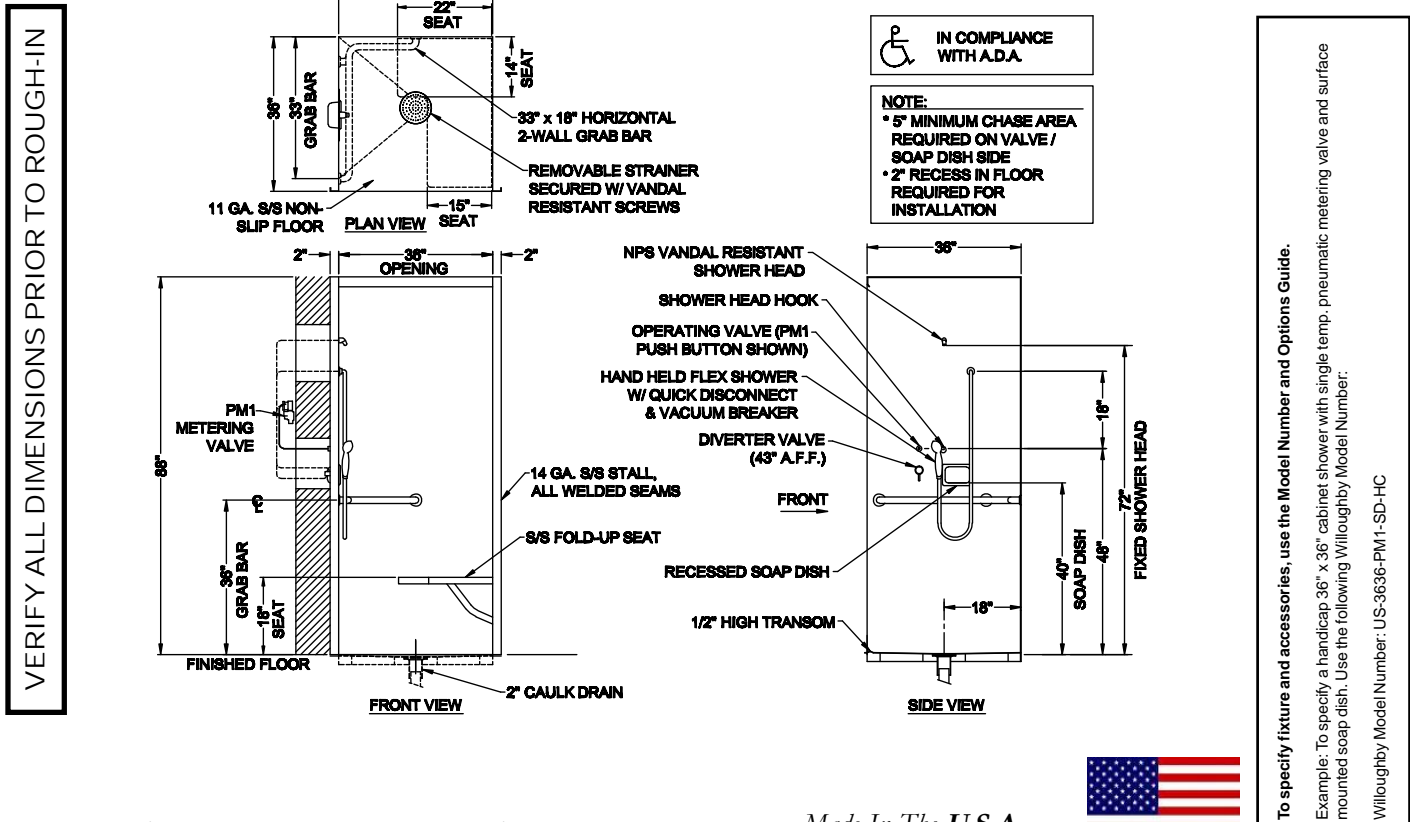

To specify fixture and accessories, use the Model Number and Options Guide.  
 Example: To specify a handicap 36" x 36" cabinet shower with single temp. pneumatic metering valve and surface mounted soap dish. Use the following Willoughby Model Number:  
 Willoughby Model Number: US-3636-PM1-SD-HC

**Willoughby Industries, Inc.**

Made In The U.S.A.

